


Vibration absorber with Copper connection (VASC) & Stainless Steel connection (VASS)

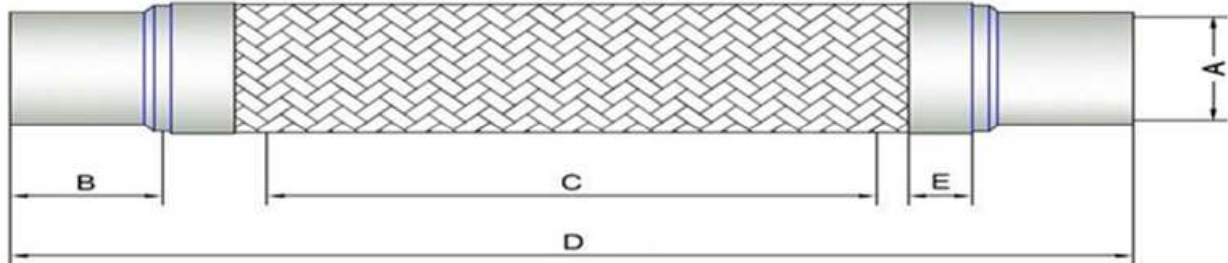

Material Specification

Corrugated Tube	Wire Braid	Grooved Ferrule	Ferrule	Tube End
304 Stainless Steel	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel	Copper

Dimension Specification

Model No.	Actual OD of Copper tubing (inch)	Dimensions (mm)					Max Working Pressure (psig)	Burst Pressure (psig)	Weight (kg)
		A (I.D)	B (±3)	C (±3)	D (±6)	E (±1.5)			
VAS-014	1/4"	6.7	17	133	202	10	650	3250	0.12
VAS-038	3/8"	9.6	18	141	215	10	650	3250	0.12
VAS-012	1/2"	12.8	18	151	225	10	650	3250	0.14
VAS-058	5/8"	16.2	20	169	247	10	650	3250	0.2
VAS-034	3/4"	19.2	23	180	266	11	650	3250	0.285
VAS-078	7/8"	22.5	25	211	301	11	650	3250	0.305
VAS-118	1-1/8"	28.8	32	223	329	12	600	3000	0.435
VAS-138	1-3/8"	35.3	35	274	392	14	550	2750	0.645
VAS-158	1-5/8"	41.7	40	295	425	16	510	2550	0.895
VAS-218	2-1/8"	54.5	50	370	520	16	400	2000	1.38
VAS-258	2-5/8"	67.0	60	434	613	19	350	1750	2.37
VAS-318	3-1/8"	79.6	70	481	680	19	320	1600	3.43
VAS-358	3-5/8"	92.5	85	579	812	21	190	570	4.4
VAS-418	4-1/8"	104.9	90	589	832	21	190	570	5.12

Model No.	Actual OD of Copper tubing (metric)	Dimensions (mm)					Max Working Pressure (psig)	Burst Pressure (psig)	Weight
		A (I.D)	B (±3)	C (±3)	D (±6)	E (±1.5)			
VAS-6mm	6mm	6.7	17	133	202	10	650	3250	0.12
VAS-10mm	10mm	10.2	18	141	215	10	650	3250	0.12
VAS-12mm	12mm	12.2	18	151	225	10	650	3250	0.14
VAS-16mm	16mm	16.2	20	169	247	10	650	3250	0.2
VAS-18mm	18mm	18.3	23	180	266	11	650	3250	0.285
VAS-22mm	22mm	22.5	25	211	301	11	650	3250	0.305
VAS-28mm	28mm	28.3	32	223	329	12	600	3000	0.435
VAS-35mm	35mm	35.3	35	274	392	14	550	2750	0.645
VAS-42mm	42mm	42.5	40	295	425	16	510	2550	0.895
VAS-54mm	54mm	54.5	50	370	520	16	400	2000	1.38
VAS-64mm	64mm	64.5	60	434	613	19	350	1750	2.37
VAS-76mm	76mm	76.5	70	481	680	19	320	1600	3.43
VAS-89mm	89mm	89.5	85	579	812	21	190	570	4.4
VAS-108mm	108mm	108.5	90	589	832	21	190	570	5.12

- Notes:**
1. OEM making is available. Any dimension can be produced upon request.
 2. Stainless Steel Vibration Absorbers are also available.
 3. Metric size Vibration Eliminators is available.